

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 10 TWN. 15_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 7-20-09
Party Chief: Wilcoxen / Greene
Crew: Finney
Type of Marker: Brass plug
Method of Establishment: Paul I Cripe ties 10-1981
IN S.P.C. E Zone, NAD 83
Name: 15031002
N: 501 646.462 8(m)
E: 55 391.886 4(m)

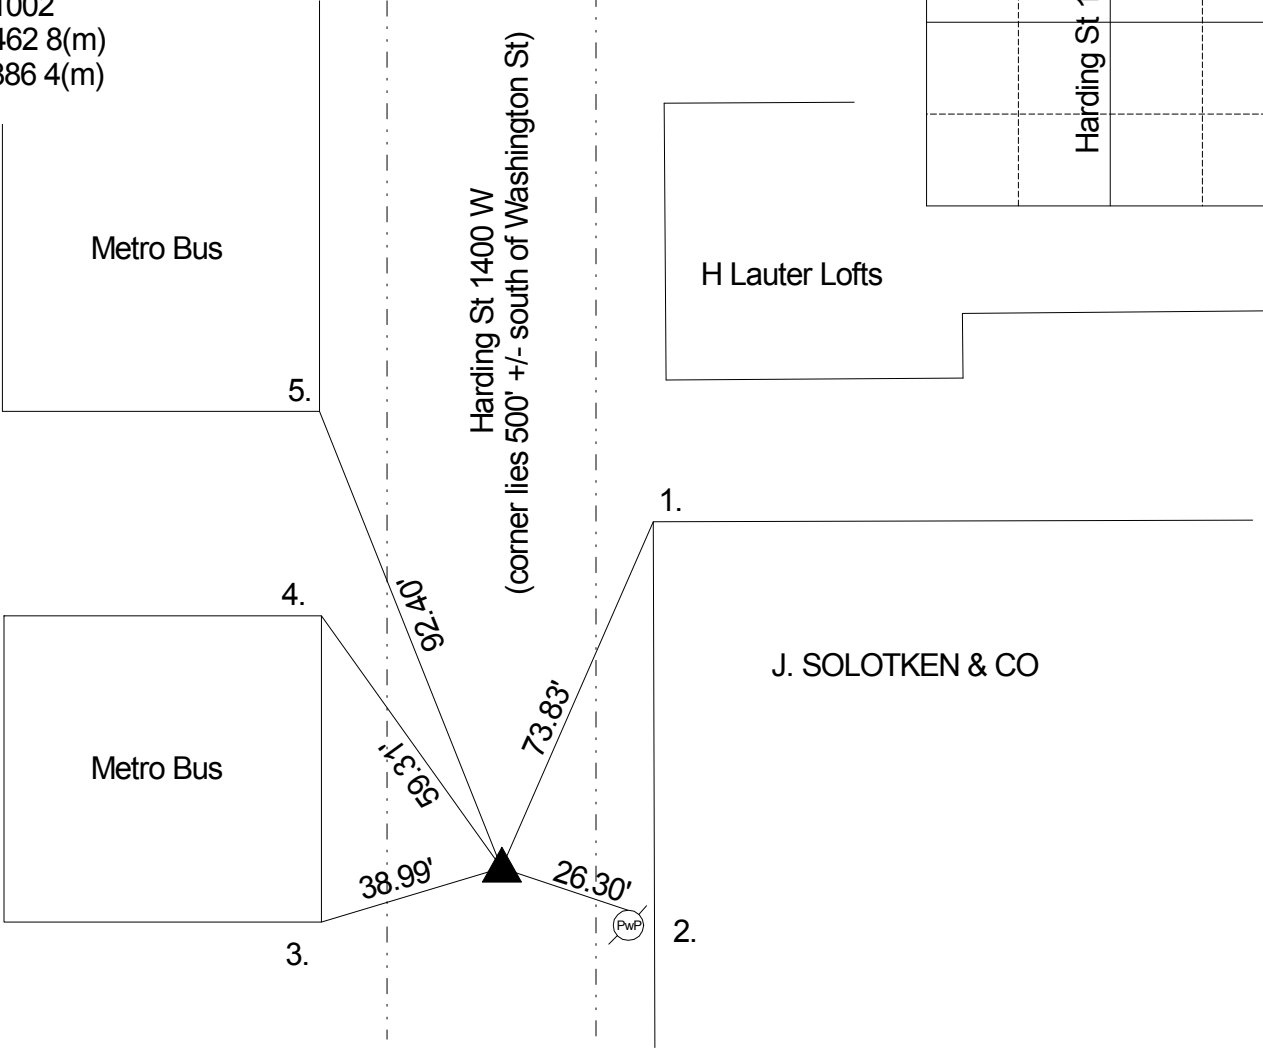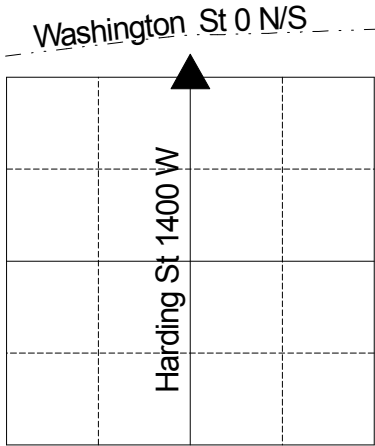

Corner originally set in 1820 as a post by Wm. B. Laughlin with the following witnesses: 14” hickory bearing N 86 E 22 links and a 10” buckeye bearing S 10 W 10 links (Marion County Atlas p. 6). A survey by H.B. Fatout on July 22, 1882 indicates no stone or witnesses (Center legal Book p. 60). Corner referenced by P.I. Cripe in 10/1991 and called an iron rod with an aluminum cap. Corner referenced by Wilcoxen on 3/12/92 and called a brass plug. Corner referenced by Wilcoxen on 7/11/1999 and called a brass plug. Corner referenced by Greene on 7/20/2009 and called a brass plug.

REF.	DISTANCE	DESCRIPTION
1.	73.83'	NW corner of brick of J.Solotken & Co. 101 S Harding St
2.	26.30'	Mag nail w/brass washer N PwP #116-533 B 18" up
3.	38.99'	SE corner of brick southern Metro Bus building
4.	59.31'	NE corner of brick southern Metro Bus building
5.	92.40'	SE corner of brick northern Metro Bus building